

# Polarization Maintaining Dense Wavelength Division Multiplexer

## Features

Low Insertion Loss  
High Quality and Reliability

## Applications

High Speed Networks  
Coherent Detecting  
Fiber Sensors  
Research

## Specifications


Parameters	Unit	Values		
Filter Type		200GHz	100GHz	
Pass Band	Center Wavelength	nm	ITU Grid	
	Typ. Bandwidth at 0.5dB	nm	0.7	0.4
	Min. Bandwidth at 0.5dB	nm	0.5	0.2
	Typ. Channel Isolation at C→P	dB	30	30
	Min. Channel Isolation at C→P	dB	25	25
	Typ. Insertion Loss at C→P	dB	0.8	1.0
	Max. Insertion Loss at C→P	dB	1.0	1.2
Reflection Band	Typ. Channel Isolation at C→R	dB	15	15
	Min. Channel Isolation at C→R	dB	12	12
	Typ. Insertion Loss at C→R	dB	0.3	0.3
	Max. Insertion Loss at C→R	dB	0.5	0.5
Typ. Extinction Ratio at 23°C	dB	22	22	
Min. Extinction Ratio at 23°C	dB	20	20	
Min Return Loss	dB	50	50	
Min. Directivity	dB	45	45	
Center Wavelength Stability	nm/°C	≤0.002		
Thermal Stability	dB/°C	≤0.005		
Max. Optical Power (CW)	mW	500		
Max. Tensile Load	N	5		
Fiber Type		PM Panda Fiber		
Operating Temperature	°C	-5 to +70		
Storage Temperature	°C	-40 to +85		

\*Above specifications are for devices without connectors.

\*For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower, and ER will be 2dB lower.

\*The PM fiber and connector key are aligned to the slow axis.

## Package Dimensions

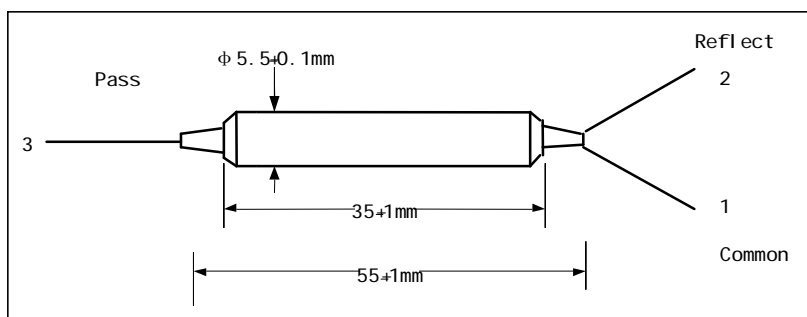

## Ordering information

PMDWDM-①-②②-③③③-④④④-⑤

①: Channel Spacing

1 - 100 GHz

2 - 200 GHz

②②: ITU Grid

③③③: Connector Type on Port 1, 2 & 3

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

④④④: Fiber Jacket on Port 1, 2 & 3

B - 250um Fiber

D - 400um Fiber

L - 900um Loose Tube

S - Specify

⑤: Fiber Length

0.8 - 0.8 m

S - Specify