

Polarization Maintaining Fiber Patchcord

Features

High Isolation
Low Insertion Loss
Large Aperture Features

Applications


Fiber Optic Lasers
Optical Transmitters & Transceivers
Fiber Instruments
Fiber I/O Ports

Specifications

Parameters	Unit	Values
Center Wavelength	nm	980*, 1064*, 1310, 1480 or 1550
Key Orientation		Slow Axis
Axis Alignment	deg	± 3
Typ. Insertion Loss	dB	0.3 0.4
Max. Insertion Loss	dB	0.5
Min. Return Loss	dB	50 60
Min. Extinction Ratio	dB	23
Max. Optical Power (CW)	mW	300
Max. Tensile Load	N	5
Fiber Type		PM Panda Fiber
Fiber Length Tolerance	%	± 10
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

* IL is 0.1dB higher for short wavelength, including 980nm & 1064nm.

Package Dimensions

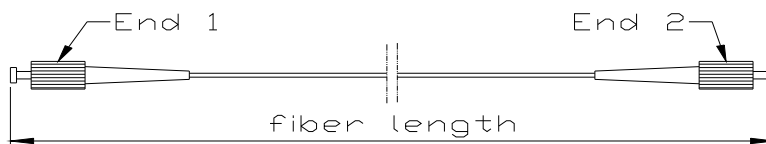

Ordering Information

PMP-①①-②-③③-④-⑤

①①: Wavelength

55 - 1550nm

48 - 1480nm

31 - 1310nm

06 - 1060nm

98 - 980nm

S - Specify

③③: Connector Type on End 1 & 2

1 - FC/UPC

2 - FC/APC

3 - SC/UPC

4 - SC/APC

N - None

S - Specify

④: Fiber Jacket

B - 250um Bare Fiber

D - 400um Bare Fiber

L - 900um Loose Tube

T - 900um Tight Buffer

C - 3mm Cable

S - Specify

②: Key Width (for FC Connector)

R - 2.02mm

⑤: Fiber Length

1 - 1.0m

S - Specify